

# Digta▶▶

*SIMPLY PROFESSIONAL DICTATION*



## *Digta 7* *Dictation for Pros*

Easy Mode  
▶▶▶

MADE IN GERMANY



The sturdy device comes with a one-of-a-kind slide switch offering Touch Pin function. This way you can dictate with your eyes closed, you'll automatically feel the stop position. Plus, the slide switch can be configured to meet your dictation style – making it especially practical for those new to Grundig dictation machines. The display is large and shows all information very clear. Optimum audio quality in the DSSPro recording format (ideally suitable for speech recognition as well), effective workflow functions and highest security standards are a matter of course.

- Easy Mode for especially easy operation
- Slide switch offering individual configuration of the function sequence

- 2 GB on-board memory for almost 300 hours of recording time, extendable with external DigtaCard
- Best sound quality thanks to DSSPro, ideally suitable for speech recognition
- Display: high contrast, transfective, easy-to-read screen design
- Li-Ion rechargeable battery/batteries
- Effective DSS workflow by means of key word allocation
- Pluggable barcode reader
- PIN/PUK protection, UUID, encryption of dictations
- Accessories: Digta Station 447
- DSSMover for automatic dictation transfer
- Digta Configurator for comfortable configuration of your dictation device

### Additional Features


#### Digta 7 Premium

- Speech recognition for character entry
- Stereo recordings
- Motion sensor
- Extra workflow functions

[www.grundig-gbs.com](http://www.grundig-gbs.com) · [info@grundig-gbs.com](mailto:info@grundig-gbs.com) · Infoline: +49(0) 911-47 58-4

Your Grundig Business Systems partner:

**GRUNDIG**  
Business Systems

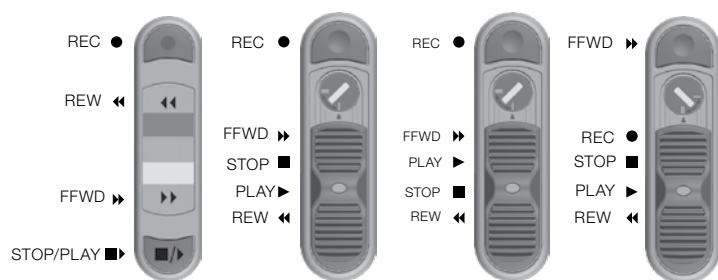

<i>Display</i>	Transflective LCD display, 16 grey scale values, white background illumination
Screen diagonal	46,5 mm / 1,83 Inch
Resolution	160 x 160 pixel
<i>Memory medium</i>	2 GB of internal memory (approx. 300 h of recording time in DSS), MMC/SD/SDHC slot for Digita Card (up to 32 GB)
<i>Memory capacity</i>	10 min of recordings (data rate)
DSS Standard Play (SP)	approx. 1 MB (13,5 kbit/s)
DSS Pro Quality Play (QP)	approx. 2 MB (26 kbit/s)
WAV Mono	9,6 MB (8 kHz sampling rate, 15 kbit/s) up to 57,6 MB (48 kHz sampling rate, 93 kByte/s)
MP3 Mono	4,7 MB (64 kbit/s)
	9,4 MB (128 kbit/s)
	14,1 MB (192 kbit/s)
<i>Recording quality/ Frequency range</i>	
DSS Standard Play(SP):	200 - 5 500 Hz, Mono
DSS Pro Quality Play(QP):	200 - 7 500 Hz, Mono
MP3	64, 128, 192 kbit/s, Mono, Stereo
WAV	200 up to 20 000 Hz (according to sampling rate), Mono, Stereo
<i>Play-back speed</i>	From 50 % to 150 % adjustable in 20 levels
<i>Microphone socket</i>	3.5 mm jack, stereo Impedance 2,2 kOhm (at 1 kHz), Sensitivity – 42 dB (0 dB = 1 V/Pa at 1 kHz)
<i>Earphone socket</i>	3.5 mm jack, stereo Impedance of 32 Ohm max. output voltage 160 mV
<i>PC interface</i>	USB 1.1, USB 2.0 high speed USB removable disc, USB audio and USB HID (suitable as dictation microphone on the PC), USB power supply and battery recharging
<i>Batteries</i>	2 x 1,5 V; type Micro/AAA
<i>Rechargeable battery</i>	Rechargeable battery pack 962 (Li-ion rechargeable battery, 3.7V /1000mAh)
Charging time	about 4 h
Operating time	up to 25 h (recording format DSS)
<i>Dimensions</i>	
Dictation device (LxWxD, without protruding user controls)	approx. 130 x 52 x 22 mm / 5.12 x 2.05 x 0.87 inch
<i>Weights</i>	
(Dictation device incl. rechargeable battery pack 962)	approx. 125 g / 4.303 oz
<i>Internal speaker</i>	
Diameter	28 mm
Max. power output	200 mW
<i>Storage temperature</i>	-20° C up to +70° C
<i>Operating temperature</i>	-15° C up to +35° C
<i>Casing color</i>	black

### Housing

Composite  
Softtouch Composite (chromium plated decoration ring)

### Operating elements

Slide switch  
Configurable function keys  
Left-handed operation

### In-built microphones

### Recording formats

DSS, DSS Pro (overwrite, insert, attach, mono)  
WAV (mono, stereo, overwrite, insert, attach)  
MP3 (attach, mono, stereo)

### Workflow

Priority  
Deadline  
Workflow lists:  
Worktypes and sub dictation types  
Secretaries  
Authors  
Groups  
Categories  
Text editor for dictation ID  
Index function  
Info function  
Data lists  
Postponed dictation / EOL  
Lock the dictation

### Safety

PIN enquiry when the device is switched on (can be turned off), ensuring access protection of the internal memory, dictation encryption 128/256 bit with password protection, confusion proof UUID of each dictation

### Special functions

Quick help function,  
Reporting on dictations finished in the office and questions to the author,  
automatic follow-up dictation by setting a specific time  
Transcription workstation operation with foot control (only with Digita Station 447 Plus)

### Profiles

Easy Mode, Menu Mode  
Freely configurable profiles

### Motion sensor

Automatic wake-up  
Display swivels with left-handed use

### Speech recognition

Character input via Nuance VoCon Engine

### Scope of delivery

USB cable, pouch, wrist strap  
2 x Alkaline AAA batteries  
Rechargeable battery pack 962  
Slider Key (Slide switch setting)  
Power Supply Unit 477  
DSS Mover, Digita Configurator, AdapterServerConfig

The performance features described by Grundig only apply to genuine Grundig accessories. The use of non-Grundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems. Grundig Business Systems GmbH Emmericher Straße 17, D-90411 Nuremberg, E-Mail: info@grundig-gbs.com, internet: www.grundig-gbs.com. Printed in Germany. Alterations and availability are subject to change without prior notice. Order-number: HNE 6235 06/2016

Available with other dictation and speech recognition software.  
Ask your local dealer.